


耐油绝缘软管 ORTAC 300

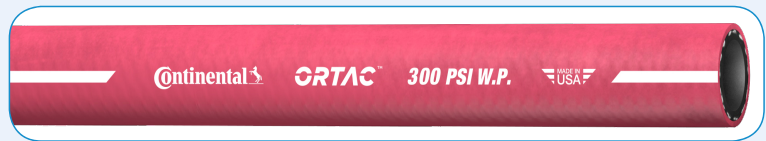

应用:

■ 胶管（耐油内外层）是最广泛的高质量多用途胶管，可用于比较恶劣的工业环境，可输送空气，油，水，煤油以及化工原料。不导电，1000伏直流电下每英寸电阻大于1兆欧姆

Applications:

■ It (Oil Resistant Tube and Cover) is our most popular premium-quality multipurpose hose. Used in the most abusive industrial applications, Ortac will handle air, oil, water, kerosene and some chemicals. Non-conductive, minimum electrical resistance greater than one megohm per inch of hose length; at 1000 Volts DC

技术参数:

- 内层: 耐油丁腈胶, RMA分类A级 (高耐油性)
- 增强层: 合成纤维缠绕, 2"的是合成纤维编织
- 外层: 红色或黄色Carbryn合成胶RMA分类A级 (高耐油性)
- 工作温度: -29° C到99° C (20° F到210° F)

Technical description:

- Tube: Nitrile synthetic rubber, RMA Class A (high oil resistance)
- Reinforcement: Spiral synthetic yarn, 2" is braided
- Cover: Red or Yellow Carbryn Nitrile synthetic rubber, RMA Class A (high oil resistance)
- Temperature: -29°C to 99°C (20°F to 210°F)

耐油绝缘软管 ORTAC

产品编码 No.	内径		外径 mm	工作压力 bar	重量 kg/m	包装长度 m
	in	mm				
HM-20026560	3/16"	4.8	11.8	20.7	0.10	152.40
HM-20026561	1/4"	6.4	15.7	20.7	0.21	152.40
HS-20026563	5/16"	7.9	17.3	20.7	0.24	152.40
HS-20026564	3/8"	9.5	18.6	20.7	0.27	152.40
HS-20026568	1/2"	12.7	22.6	20.7	0.37	152.40
HS-20026570	5/8"	15.9	26.9	20.7	0.52	152.40
HS-20026571	3/4"	19.1	30.2	20.7	0.60	152.40
HS-20026575	1"	25.4	38.1	20.7	0.88	137.16
HS-20026579	1-1/4"	31.8	46.0	20.7	1.13	121.92
HS-20026583	1-1/2"	38.1	52.8	20.7	1.31	91.44